

Mist 設定マニュアル

- WLAN -

SSIDを適用するアクセスポイントの選択

ジュニパーネットワークス株式会社
2021年7月 Ver 1.0

JUNIPER 
driven by Mist AI

はじめに

- ❖ 本マニュアルは、『SSIDを適用するアクセスポイントの選択』について説明します
- ❖ 手順内容は 2021年7月 時点の Mist Cloud にて確認を実施しております
実際の画面と表示が異なる場合は以下のアップデート情報をご確認下さい
<https://www.mist.com/documentation/category/product-updates/>
- ❖ 設定内容やパラメータは導入する環境や構成によって異なります
各種設定内容の詳細は下記リンクよりご確認ください
<https://www.mist.com/documentation/>
- ❖ 他にも多数の Mist 日本語マニュアルを「ソリューション&テクニカル情報サイト」に掲載しております
<https://www.juniper.net/jp/ja/local/solution-technical-information/mist.html>

無線LAN 適用するアクセスポイントの選択

1. [Network]から[WLANs] をクリックします

The screenshot shows the Mist Network Management console interface. The left sidebar contains a navigation menu with the following items: Monitor, Marvis™, Clients, Access Points, Switches, Gateways, Location, Analytics, and Network. The 'Network' item is selected, and a sub-menu is displayed with the following options: WLANs (Setup wireless networks and guest portal pages), Labels (Define labels for users, APs, WLANs, etc), Policy (Control access to network resources), Security (View threats on your wireless network), Mist Edges (View and configure Mist Edges), Tunnels (Configure tunnels for WLAN data), Packet Captures (Create and download packet captures), Radio Management (Setup and configure settings for RRM), Pre-shared Keys (Create keys for users and groups), and Switch Configuration (Apply consistent switch configuration across a site). The 'WLANs' option is highlighted with a red box.

2. 対象のSSIDをクリックします

The screenshot shows the Mist Network Management console interface for the 'WLANs' configuration page. The page title is '1 WLANs' and the site is 'Osaka_Office'. A search filter is present. Below the filter is a table of WLANs with the following columns: SSID, Enabled, Template, Band, Security, VLAN ID, WLAN Limit, and Client Limit. The table contains one entry: 'Test-Wifi', which is highlighted with a red box. The 'Enabled' checkbox is checked, and the 'WLAN Limit' and 'Client Limit' are both set to 'Unlimited / Unlimited'.


SSID	Enabled	Template	Band	Security	VLAN ID	WLAN Limit	Client Limit
Test-Wifi	<input checked="" type="checkbox"/>	none	2.4G, 5G	WPA-2/PSK		Unlimited / Unlimited	Unlimited / Unlimited

無線LAN 適用するアクセスポイントの選択

3. 無線LAN(SSID)を適用する方法は以下3種類の方法がございます
適用するアクセスポイントの数や設計に応じて、好きな方法で設定できます

【適用方法①全アクセスポイントへ適用】


[All APs]を選択すると、
全てのアクセスポイントにSSIDを適用
します

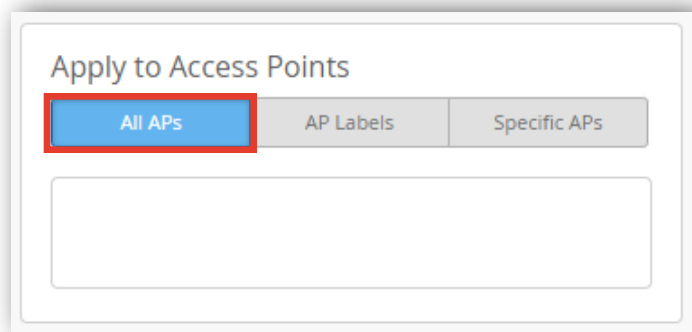

The screenshot shows a web interface titled "Apply to Access Points". It has three tabs: "All APs", "AP Labels", and "Specific APs". The "All APs" tab is highlighted with a red box. Below the tabs is a large empty rectangular area.

【適用方法②ラベル別】

[AP Labels]を選択すると、特定のラベル
が付与されているアクセスポイントのみSSID
が適用されます

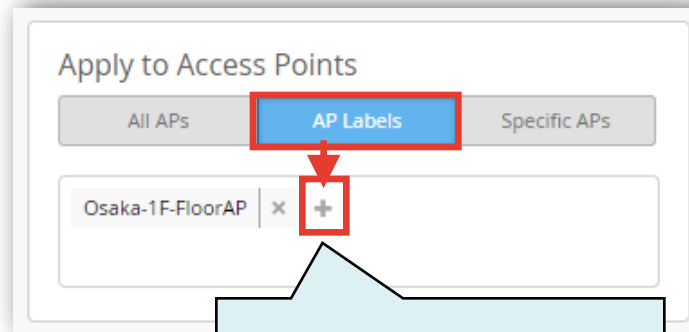


The screenshot shows the "Apply to Access Points" interface with the "AP Labels" tab selected and highlighted with a red box. Below the tabs, a list contains one item: "Osaka-1F-FloorAP" followed by a red square containing a white plus sign (+). A red arrow points from the plus sign to a callout box below.

[+]をクリックすると、
ラベルを追加できます

【適用方法③アクセスポイント別】

[Specific APs]を選択すると、
指定のアクセスポイントのみSSID
が適用されます

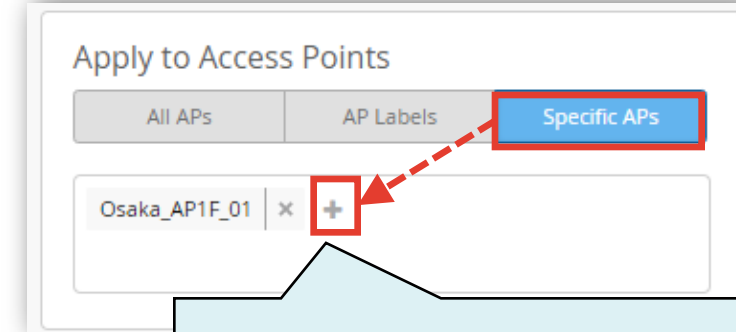

The screenshot shows the "Apply to Access Points" interface with the "Specific APs" tab selected and highlighted with a red box. Below the tabs, a list contains one item: "Osaka_AP1F_01" followed by a red square containing a white plus sign (+). A red dashed arrow points from the plus sign to a callout box below.

[+]をクリックすると、
アクセスポイントを追加できます

無線LAN 適用するアクセスポイントの選択

4. [Save]をクリックすれば、設定完了です

The screenshot shows the Mist management console interface for configuring a WLAN. The left sidebar contains navigation options: Monitor, Marvis™, Clients, Access Points, Switches, and Gateways. The main content area is titled 'WLANs : Test-Wifi' and includes the following fields and options:

- SSID:** Test-Wifi (with a copy icon and '= Test-Wifi' text)
- WLAN ID:** bd478bc6-e9c3-4e5c-b322-095b249ae1bf (with a copy icon)
- Security:**
 - WPA-2/PSK with passphrase (with a password field containing dots and a 'Reveal' link)
 - Enable PPSK Radius Mac Auth
 - WPA-2/EAP (802.1X)
 - Open Access

At the top right of the configuration area, there are four buttons: 'Create Template', 'Delete WLAN', 'Save' (highlighted with a red box), and 'Cancel'. The top right of the console shows the time 'WED, 02:43 PM' and user profile icons.

Thank you

JUNIPER
driven by Mist AI 